



innosonix
electronic



MAXX-SERIES

DIGITAL POWER AMPLIFIERS


MA32/D

DATASHEET



FEATURES

- MA32/D is a cutting edge 32 channel power amplifier combining FPGA-based signal processing with advanced Class D power stages and universal power supply for global use in a 2U 19" package.
- Each channel can deliver a power of 280W at 4 Ohm load with less than 1% THD.
- Despite the extremely compact design, the MA32/D achieves a channel separation of more than 70dB between adjacent channels. Distant channels typically reach 90dB.
- Each channel can be disabled in software. The even low IDLE power consumption of 165W can be further decreased by disabling unused channels.
- Advanced DSP-controlled power supply with PFC for almost sinusoidal current draw on all common line voltages (90 - 264V 50/60Hz).
- Web-based remote control makes usability straightforward and platform-independent. We reveal the complete protocol definition for integration in third party controller. We offer mDNS (Bonjour) and a proprietary simple UDP protocol to discover devices on your network. IP settings can be changed across IP subnet borders by the UDP implementation as well.
- The amplifier accepts MAD1 optical, 2x MAD1 coaxial, 2x AES3id and DANTE™ (Option IF1) as input. Channels can be patched smoothly between all interfaces. All inputs can also be used as the clock source.
- The optional DSP functionality (D1) offers per channel: 5 EQs, High- Lowpass up to 48dB/Oct, Peak limiter, Volume and Delay. For more advanced filtering FIR filters can be used (D2).
- The output current of all channels is measured and feed to a 20kHz detector. By adding a pilot tone by either the internal generator or an external source, the connection and voice coil of your speakers can be monitored. Threshold and debounce time is adjustable per channel. (M1)
- The „ramp volume at startup“ feature with adjustable time and the panic mute via UDP/IP functionality helps to react when errors in complex installations occur.
- IP and mute settings can be changed on the front panel. In normal operation, the LCD shows level meters of all 32-channels.
- The amplifier is protected against DC, overcurrent and overtemperature. A compressor with slow release time is responsible for limiting the maximum power drawn from the power line. The limitation smoothly reduces the gain at all channels simultaneously so that no acoustic picture distortion will occur in overload situations.
- The Fans are temperature controlled and switchable between low noise and high power mode.

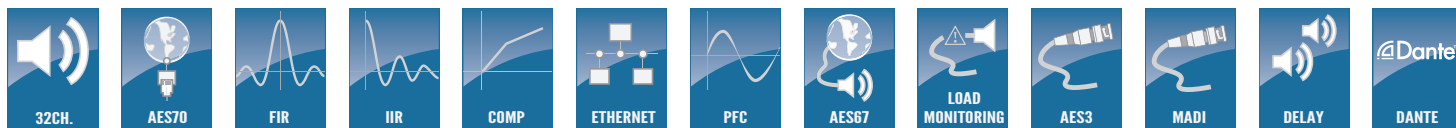



General			
Number of Channels		32	
Output Power (EIAJ Test Standard 1kHz 1% THD)	4Ω	8Ω	
	280W		140W
Max output Voltage	47 V _{peak}		
Max output Current	15 A _{peak}		
Audio			
DC Offset		< 25mV	
Frequency response	10Hz-20kHz / 4-8Ω: +1.0 -1.5dB		
S/N typ	105dBA		
Gain	32dB (Input dBFS + Gain = Output dBV)		
THD+N @ 4Ω	1W	100W	
	< 0.05%	< 0.2%	
SMPTE IMD	< 0.05%		
CCIF IMD	< 0.05%		
Output impedance	typ 60 mΩ		
Crosstalk	channel enabled		channel disabled
	typ < 70dB	typ 90dB (distant channels)	typ < 120dB
Latency	48kHz	44.1kHz	
	2.04ms	2.19ms	
Protection	Overtemperature, DC and Overcurrent		
DSP			
Architecture		FPGA based 48-bit fixed point	
Filter per channel	5x EQ, 1x Highpass, 1x Lowpass		
Filter types	bell, notch, highshelf, lowshelf		
High- Lowpass types	6 - 48dB/Oct, Bessel, Butterworth, Linkwitz/Riley, Variable Q		
Peaklimiter	Threshold, Attack, Release		
Cliplimiter	1-50V peak		
Delay	48000 Samples per channel		
FIR Filter	2048 Tabs, ASCII file import		
Test Tone generator	sine, white- pink- brown-noise		
Frontpanel			
Indicators		Multicolor LED, LCD Display	
Controls	Power switch, 6 navigation Keys, rotary encoder		
Maintenance	Dust filter foam behind 3 panels		
Rearpanel			
Control input connectors		RJ45 (100Mbit/s Ethernet)	
Audio signal input connectors	RJ45 (DANTE), BNC 75R (MADI Coax, AES3id), SC Optic (MADI Fibre)		
Speaker connector	Wuerth Elektronik 691352710002		
	Phoenix MSTB 2,5/ 2-ST - 1754449		
AC mains	Neutrik Powercon True1		



AC Mains Power




Power supply	Universal, regulated switch mode with PFC (Power Factor Correction)			
Operating Voltage	90 - 264VAC 50/60Hz			
AC Current max.	16A			
Inrush Current	50A max			
Suggested circuit breaker	B16			
Earth Leakage Current	< 2mA / 240V			
Power Factor	@230V		@110V	
full load	0.97		0.97	
idle	0.55		0.96	
Consumption / current draw	@230V		@110V	
Idle	165W	1.3A	167W	1.55A
1/8 power @ 4 Ohm	1570W	6.8A	1620W	14.8A


Thermal

Enviromental operating temperature	0 - 40°C / 32 - 104°F			
Thermal dissipation	Fan, variable speed, temperature controlled front to rear airflow			
	@230V		@110V	
idle	142 kcal/h	563 BTU/h	144 kcal/h	570 BTU/h
1/8 power @ 4 Ohm	387 kcal/h	1536 BTU/h	430 kcal/h	1700 BTU/h

Construction

Dimension	W 482.6mm (19"), H 88.46mm (2RU 3.5"), D 392.3 (15.4")			
Weight	14.5 kg, 32 lb			

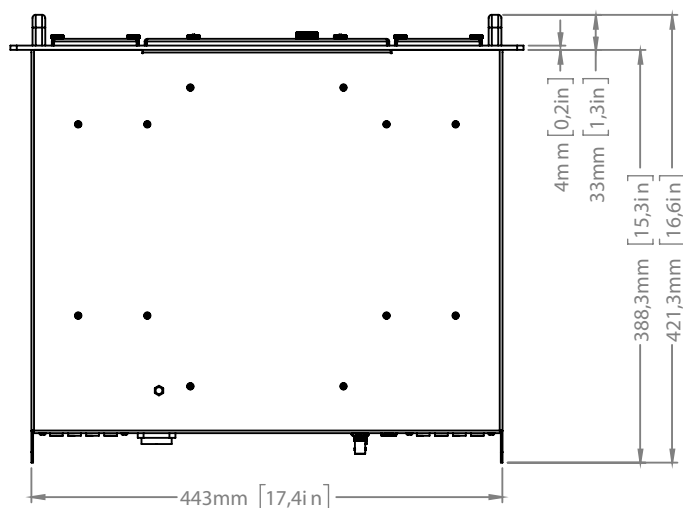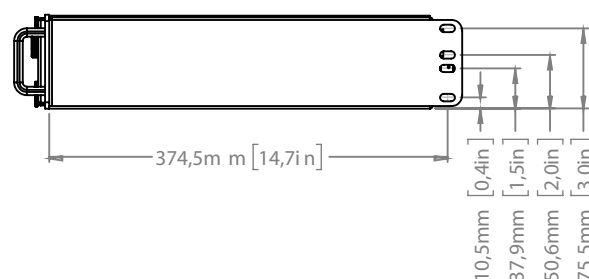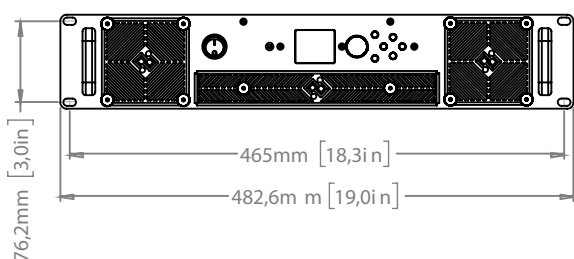

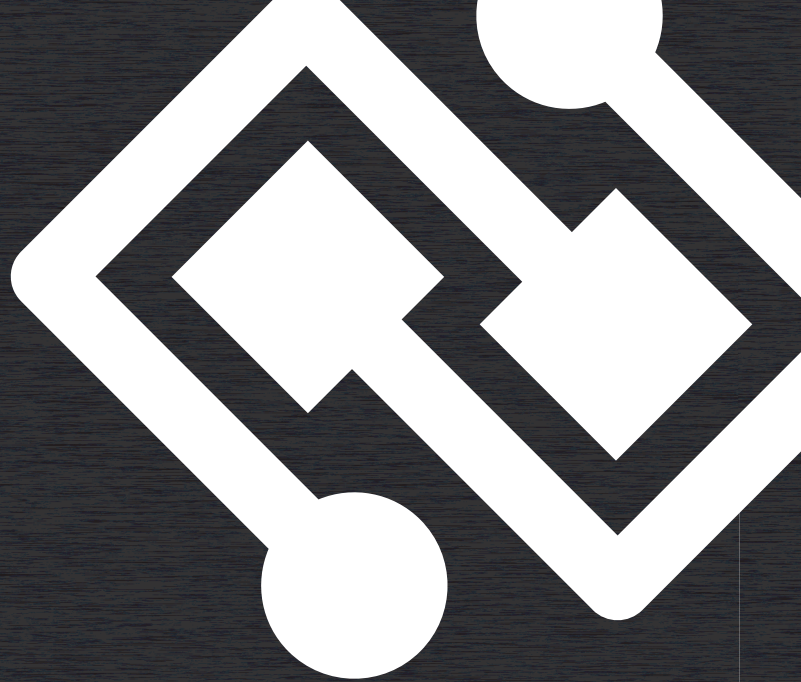

Address : innosonix GmbH
 Hauptstr. 35
 D-96482 Ahorn (Germany)
Phone : +49 (0) 9561 74599-80
Telefax : +49 (0) 9561 74599-89
E-Mail : info@innosonix.de

innosonix GmbH
Executive board: Markus Bätz, Steffen Bätz
USt.-IdNr.: DE 266020313
HRB 5192 Coburg
WEEE-Reg.-Nr. DE 88021242

You can find us on:
www.innosonix.de
www.facebook.com/innosonix.gmbh
www.instagram.com/innosonix.gmbh