



Description

The Rumble-KU315 is a very high-power passive subwoofer featuring a 15" neodymium transducer in an ultra-shallow and slim box.

This ultimate subwoofer is extremely compact and has surprisingly high rated with a power of 2000 W. It has the fitted design and dimensions to be so powerful. It is perfect to be installed outside and it is built of a resistant and rough material to foreign agents and weather conditions. The Rumble-KU315 is engineered for maximum linear excursion and minimum residual noise. With SpeakON NL4 connectors it is easily to connect to mid and high range speakers and lines and it has to be powered by KA amplifiers series.

- Passive subwoofer
- 15" neodymium magnet woofer
- Frequency response 35 Hz - 150 Hz (-6 dB)
- Max SPL of 137 dB (peak)
- Rated power of 2000 W
- Polyurea coated birch plywood
- Black, white, custom RAL colors.



Rumble-KU315

Technical specifications

Type	Passive subwoofer
Transducers	15" neodymium magnet woofer 2 x 15" passive radiator
Frequency Response ¹	35 Hz - 150 (-6 dB)
Max SPL ²	137 dB (peak)
Rated Power	2000 W
Coverage	Omni
Nominal Impedance	4 Ω
Connectors	2x SpeakON NL4 1+ 1- pass through 2+ 2- signal


Handling & Finishes

Material	polyurea coated birch plywood
Colors	Black, White, Custom RAL
IP Rating ³	IP64
Dimensions (WxHxD) ⁴	(W x H x D): 1230 x 450 x 250 mm (48.4 x 17.7 x 9.8 in)
Weight	40 kg (88.18 lb)

¹ With dedicated preset.

² Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 8 m then scaled at 1 m.

Rumble-KU315

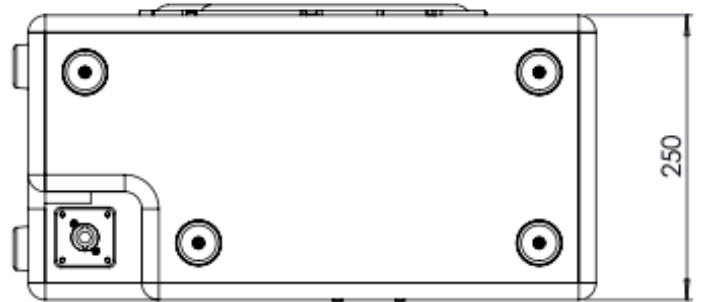

Rumble-KU315

